




**ERGONOMIC DESIGN  
COMBINED WITH HIGH  
LEVELS OF PROTECTION**

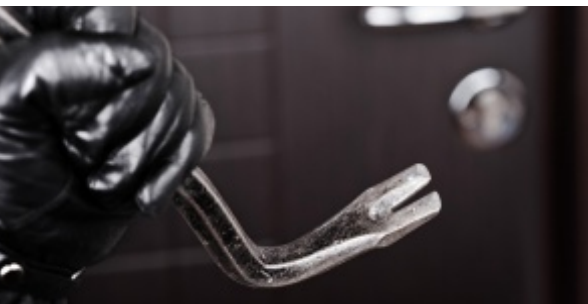

# PROGUARD

## BURGLARY-RESISTANT PROTECTION



### KEY FEATURES


- Burglary protection in accordance with the European EN 1143-1 standard, as certified by ECB•S for Grade III.
- ProGuard's special barrier material provides certified burglary protection whilst also keeping the total weight of the safe down. Less weight means lower transportation costs and greater installation options.
- A higher level of protection can be offered in a safe with reduced wall thickness and increased interior capacity.
- The three-way boltwork is constructed with solid steel bolts.
- For additional security, ProGuard is fitted with an active relocker and anti-drilling plates have been incorporated into the boltwork to withstand burglary attempts.
- Either a mechanical key lock or a high-security electronic lock can be used as the primary lock option. At least one EN 1300 Grade B lock must be fitted as standard.
- Every model can be customised with a range of internal fittings to maximise storage capacity.
- ProGuard has a modern design with an ergonomic soft-touch handle.

# PROGUARD

## PRODUCT SPECIFICATIONS

Model	External Height (mm)	External Width (mm)	External Depth (mm)	Internal Height (mm)	Internal Width (mm)	Internal Depth (mm)	Capacity (litres)	Net Weight (kg)	No. of Shelves
M-65	530	500	521	440	410	359	65	208	1
M-120	690	600	561	600	510	396	121	320	2
M-160	875	600	561	785	510	396	159	386	2
M-215	1150	600	561	1060	510	396	214	481	2
M-305	1600	600	561	1510	510	396	305	636	3
M-365	1295	785	620	1205	695	530	363	685	3
M-370	1600	675	585	1510	585	420	371	701	3
M-465	1850	675	615	1760	585	450	463	827	4

External dimensions exclude handle and hinge projections.

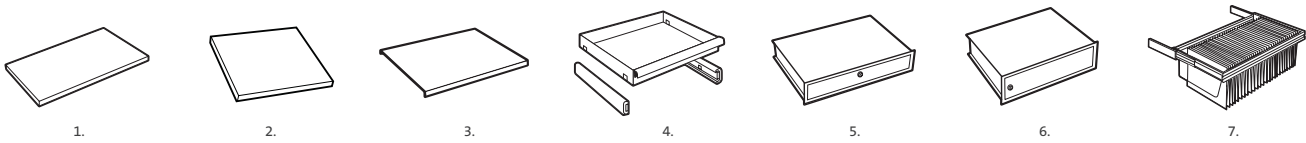

### OPTIONAL INTERNAL FITTINGS

1. Shelf\* (M-65) 2. Heavy duty shelf\*\*  
\*Max shelf capacity 60kg \*\*Max shelf capacity 120kg

AVAILABLE FROM M-120 & ABOVE

3. Shelf (prepared for hanging files)  
 4. Extendable shelf 5. Extendable drawer  
 6. Lockable compartment 7. Suspension file frame  
 NOTE: Brackets need to be ordered for each fitting

### LOCK OPTIONS

As the primary locking option, ProGuard safes can be fitted with either a high-security electronic lock or a key lock. At least one EN 1300 Grade B lock must be fitted as standard. Dual locking is available. The primary lock can be supplemented by a combination lock or both a key lock and electronic lock can be fitted. All locks are independently tested and are certified in accordance with the EN 1300 standard. ProGuard's high-security electronic lock – certified Class B – includes the following features, easily programmed by the owner:

- 1 master code, 1 supervisor code and 8 user codes.
- Time delay of up to 99 minutes between lock being operated and door being opened.
- Opening window between 1–19 minutes.
- Equipped with time delay override.
- Optional function to raise silent alarm if lock is being opened under duress.

Authorised dealer

### BURGLARY TESTING



ProGuard has been approved by ECB•S in accordance with the European EN 1143-1 standard for burglary protection in Grade III. A range of attack tools were used to test ProGuard's level of resistance, from basic tools to sophisticated thermal and electrical equipment.

### IMPROVED CAPACITY

Thanks to innovations the thicknesses of safe walls can be reduced. This means that a safe with a higher level of protection can also offer greater capacity for storing valuable items and sensitive documents.

[www.chubbsafes.com](http://www.chubbsafes.com)